
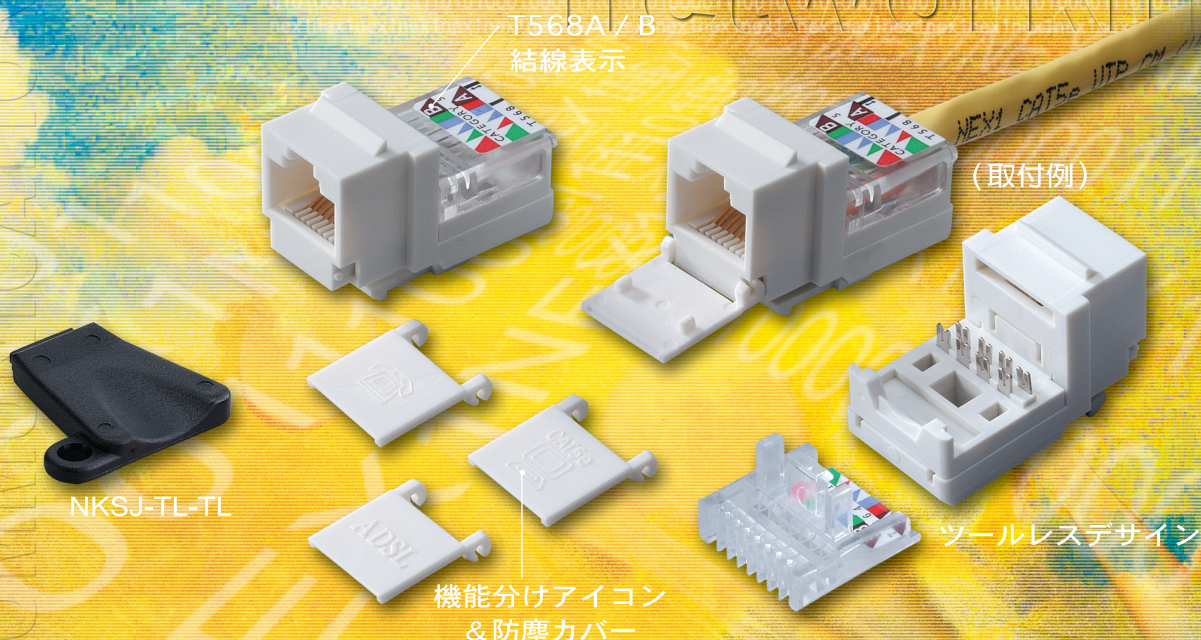




MAX Series

Electrical Specifications

- ◆ Insulation Resistance : 500M. Ω
- ◆ Contact Resistance : 20M. Ω
- ◆ Current rating : 1.5 Amps
- ◆ DC Resistance : Max.0.1 Ω
- ◆ Dielectric Withstand Voltage : 1,000VAC RMS @60Hz/1 min

◆ Tool-less Category 5e/6 Keystone Jacks

Part Number	Description	Std. Pkg. Qty.
NKSJ-TL-C5e	Category 5e tool-less typed 8-position, 8-wire Keystone jack. Termination cap is color coded for T568A and T568B wiring schemes	1
NKSJ-TL-C6	Category 6 tool-less typed 8-position, 8-wire Keystone jack. Termination cap is color coded for T568A and T568B wiring schemes	1

- ◆ Color options: White(WE), Red(RD), Blue(BE), Black(BK), Yellow(YW), Green(GN)



Termination Tool


(専用圧接工具)

Features:


- Insures easier installation
- Eliminates need for slip lock pliers
- Insures conductors are fully terminated
- より簡単なインストールができます
- スリップロックプライヤーを必要としません
- 成端部までの十分な伝導が保障できます
- ◆ 資訊插座専用工具
- ◆ 壓接免工具資訊插座省時省力
- ◆ 専用工具、易握好壓
- ◆ 壓接紮實：確保接觸端子與線緊密結合

◆ Termination Tool

Part Number	Description	Std. Pkg. Qty.
NKSJ-TL-TL	Termination tool for Tool-less typed Keystone Jacks and Patch Panels	1

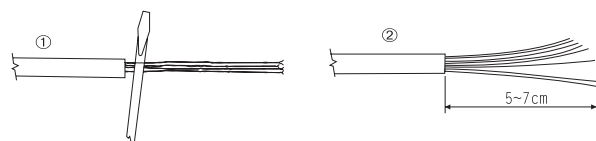

- ② 各ペアーの撚りを戻し電線を真直ぐに伸ばします

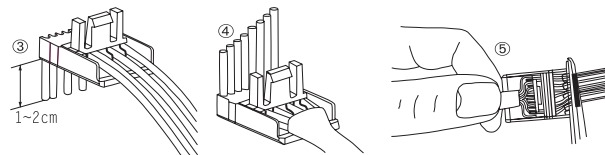

- ④ ケーブルの外皮が端末キャップの中に十分収まるまで、電線を引き込んだ状態で戻らないように強く曲げます

- ⑤ 余分な電線を端末キャップのエッジに沿って切断すると端末予備加工が終了します

