





Environmental guardian, containing no poisonous element
環境保護のため、有害物質は使われておりません
環保網路產品、不含有毒物質

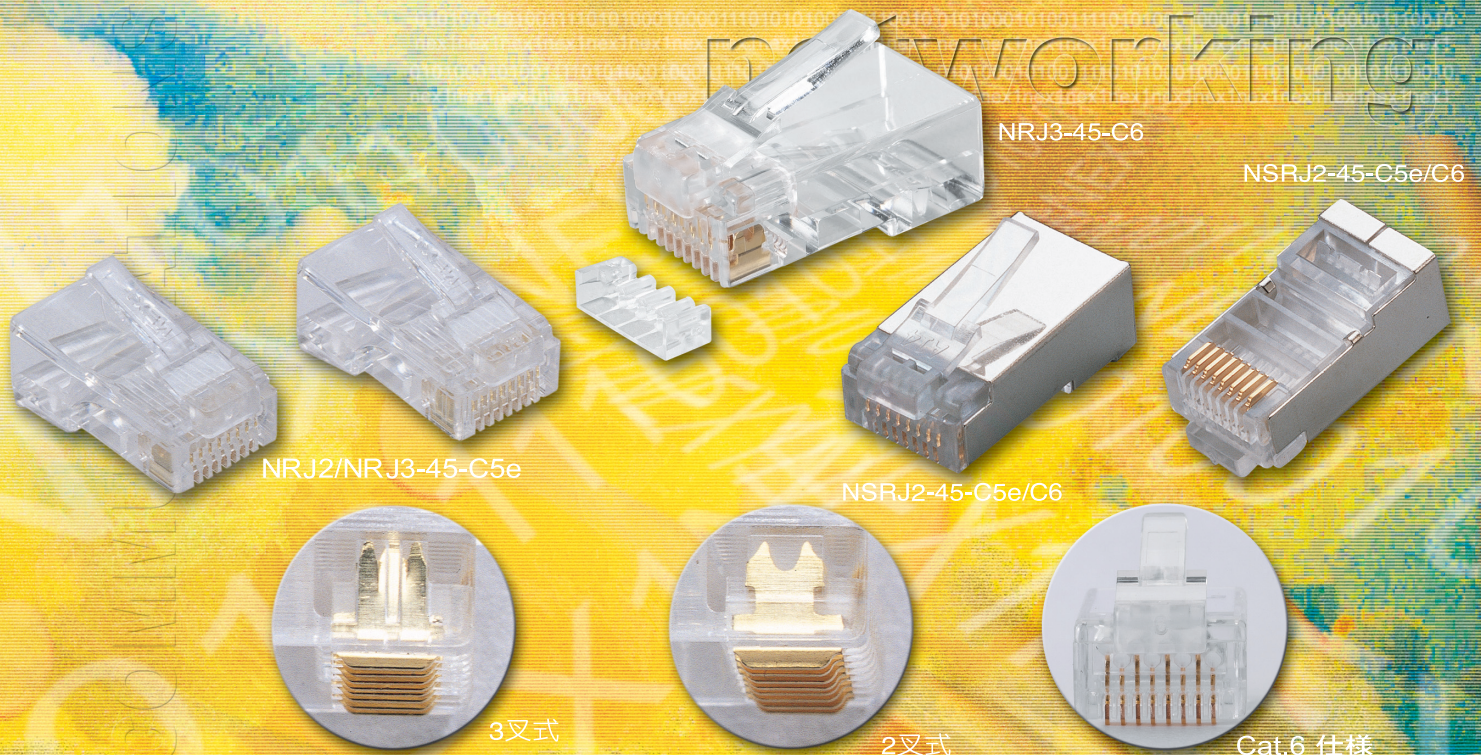

Plug Solutions



MAX Series



RJ-45 Modular Plug Series (網路水晶接頭)

Features:

- Increased flexibility: use with stranded or solid cable
- Eight-conductor modular plug works with round cables
- Use with standard termination tools
- Load bar eases wire insertion while maintaining 1/2" twist requirements
- 撚り線/単線に使用可能です
- 8芯丸断面のケーブルに使用します
- ベリリウム銅表面: 100- μ ニッケル層に100- μ 金メッキ (Cat. 6); ベリリウム銅表面: 100- μ ニッケル層に50- μ 金メッキ (Cat. 5e) です
- 標準的工具で特殊な工具は必要ありません
- かしめながら1/2インチ(12.7mm)の撚り状態を保ちます
- ◆ 使用範囲廣: 備有單芯線及多股線兩種型式
- ◆ 8支接觸針, 其材質為鍍銅, 以100- μ 鎳為底層、覆上純100- μ / 超五類 (Cat. 6); 或50- μ / 超五類 (Cat. 5e) 鍍金處理
- ◆ 與任何市售壓接工具完全相容
- ◆ 壓接容易, 且壓接作業完成之對絞長度, 均維持在1/2" 規範之內 (12.7mm)

仕様

- ◆ ベリリウム銅表面: 100- μ ニッケル層に100- μ 金メッキ (Cat. 6); ベリリウム銅表面: 100- μ ニッケル層に50- μ 金メッキ (Cat. 5e)
- ◆ 拔差し耐久: 最低1,000回
- ◆ UL®, CSA 認定

Electrical Specifications

- ◆ Insulation Resistance: 500M. Ω
- ◆ Operating temperature: -40°C ~ +125°C
- ◆ Dielectric Withstand Voltage: 500V AC

Options: 2-prong for "stranded" cables
3-prong for "solid" cables

◆ RJ-45 Modular Plug Series

Part Number	Description	Std. Pkg.	Qty.
NRJ3-45-C6	Category 6, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong)	100	
NRJ2-45-C5e	Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong)	100	
NRJ3-45-C5e	Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong)	100	
NSRJ2-45-C6	Category 6 shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong)	100	
NSRJ2-45-C5e	Category 5e shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong)	100	

